


MBA-3 ADJUSTMENT INSTRUCTIONS

- ① Loosen the Cheek Rest adjustment knob turning counter-clockwise.
- ② Pull the Cheek Rest up or push down to raise or lower to desired height then tighten the Cheek Rest adjustment knob turning clockwise, do not over-tighten.
- ③ Loosen the Length-of-Pull (LOP) adjustment knob turning counter-clockwise.
- ④ Pull or push to adjust the LOP to desired position then tighten the LOP adjustment knob turning clockwise, do not over-tighten.
- ⑤ The MBA-3 and MBA-4 Carbine buttstocks are position adjustable by pulling down on the locking pin and positioning the buttstock on the carbine buffer tube.
- ⑥ The MBA-3 buttplate additionally adjusts vertically and horizontally by loosening or by repositioning the butt plate set screws using provided 3/32 Allen wrench.
- ⑦ The MBA-3 MBA-4 Carbine buttstocks feature an exclusive anti-rattle set screw. Once you have determined the desired position you may optionally tighten the set screw with the provided Allen wrench. Do not over tighten.



Make sure Firearm is Unloaded during Assembly

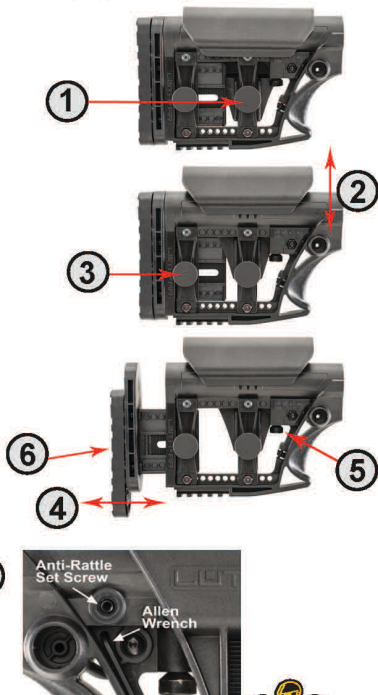

www.LUTH-AR.com

